


SPECIFICATION SHEET

STYLE: 188-4-BLANKET

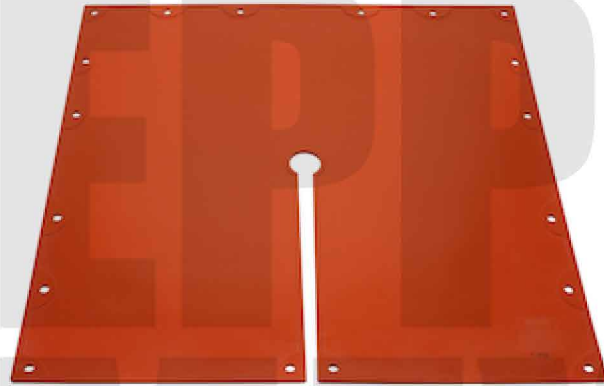

NOVAX® Class 4 Insulating Blanket

- Class 4 – rated to 36,000 Volts AC
- Meets ASTM 1048-14 Standard, ISO 9001:2015
- Type II Ozone-resistant rubber to prevent long-term aging/checking
- Slotted design covers live electrical conductors, apparatus or circuits on deadends, secondary racks and cross arms
- Molded construction provides superior flexibility to cover many irregular shapes
- Beaded edge for added strength and durability

Applications

- Electrical Contractors
- Utility Work
- Industrial Applications
- Construction Applications

Technical Data

Color	Orange
Sizes Available	OS
Packaging	Boxed
Packed	100/Case
Case Dimensions (cm)	--
Case Weight (kg)	--
Country of Origin	Malaysia
Material	Rubber
Construction	--
Certifications	NFPA 70E, ASTM D120

Performance Data

Electrical Class --

Care Instructions

Blankets must always be stored flat in the the original box or a designated storage space. The blanket should never be folded, stored under an object or in the direct rays of sun or where hot air can blow on them. Before storing, make sure the blanket is free of all petroleum-based products and/or foreign substances.

Equipos de Protección Personal

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: +1 (800) 262-5755 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED. 2022-02-22